


INDOOR LED PANELS

P2.5mm

INDOOR NOVASTAR

Front Service / Back Service / Wall Mount

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 24 months warranty included for all parts. USA based.
- In stock. Ships immediately.



FRONT SERVICEABLE

FRONT



HIGH REFRESH RATE



HIGH RESOLUTION



FIXED & RENTAL CABINETS




INDOOR



WALL MOUNTABLE

BACK

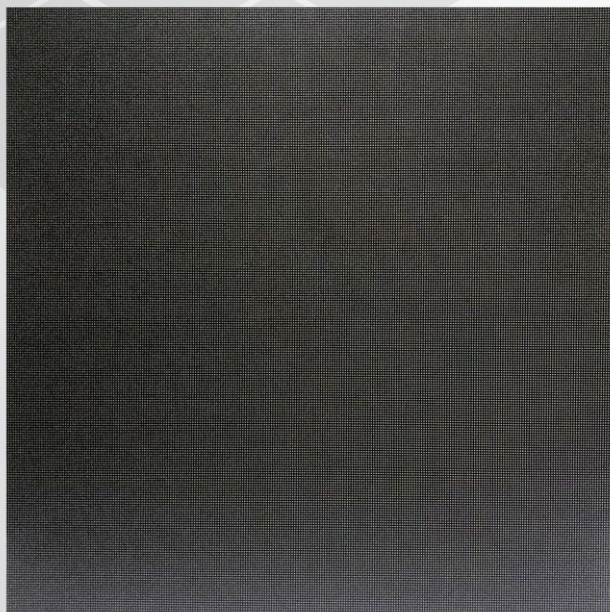


HANGING BAR: FRONT



HANGING BAR: BACK



FRONT SERVICEABLE

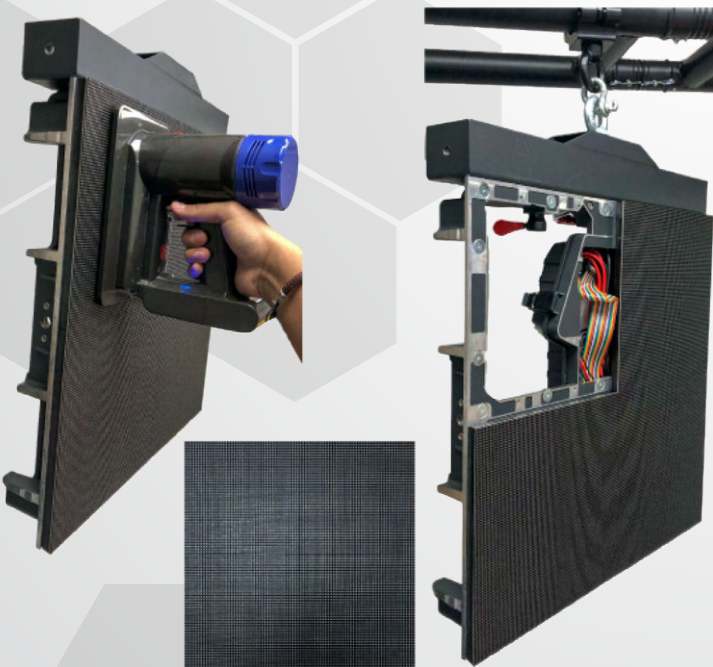

WALL MOUNTABLE



TECHNICAL SPECIFICATIONS

PIXEL PITCH	P2.5mm
LED ENCAPSULATION	King-Light SMD2020
PIXEL DENSITY	256 x 256
SIZE	640 x 640 x 75 mm / 25.2" x 25.2" x 3"
CHIP	IC5123
HIGH REFRESH RATE	3840hz
WEIGHT	21.4 lbs / 9.7 kg
RECEIVING CARD	NovaStar MRV-328

POWER SUPPLY


OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	150W/per panel
AVE. POWER CONSUMPTION	100W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS


BRIGHTNESS	1500 NITS
PROTECTION RATE	IP45
SCAN	1/32
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 160°/Vertical 160°
OPTIMAL VIEW DISTANCE	5 ft (1.5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

DIMENSIONS

FRONT DIMENSIONS

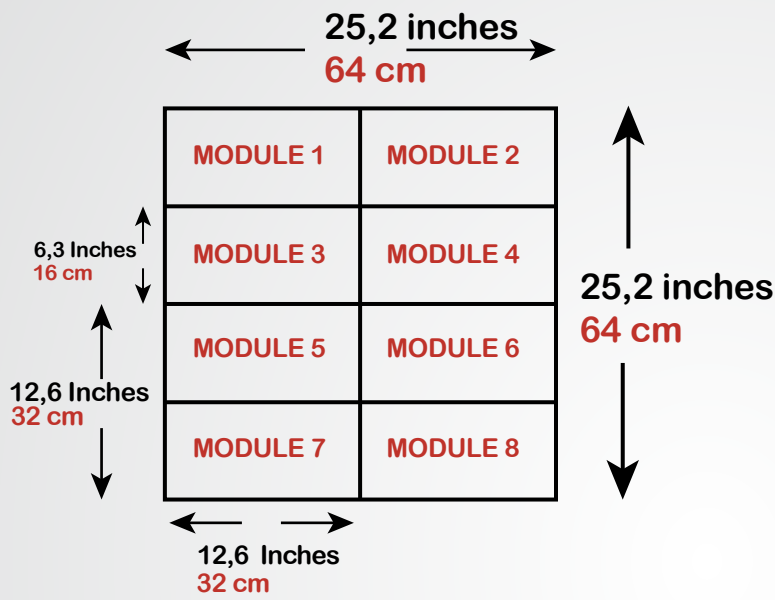

SIDE DIMENSIONS

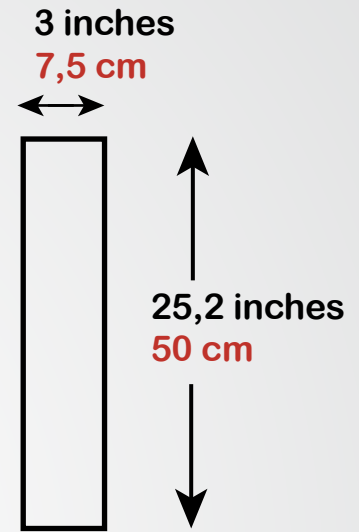

VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	20 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

