

INDOOR LED PANELS

P2.9mm DOUBLE

INDOOR NOVASTAR

Front Service / Back Service / Wall Mount

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 24 months warranty included for all parts. USA based.
- In stock. Ships immediately.



FRONT SERVICEABLE

FRONT

3840HZ

HIGH REFRESH RATE



4K RESOLUTION



FIXED & RENTAL CABINETS


BACK




INDOOR



WALL MOUNTABLE

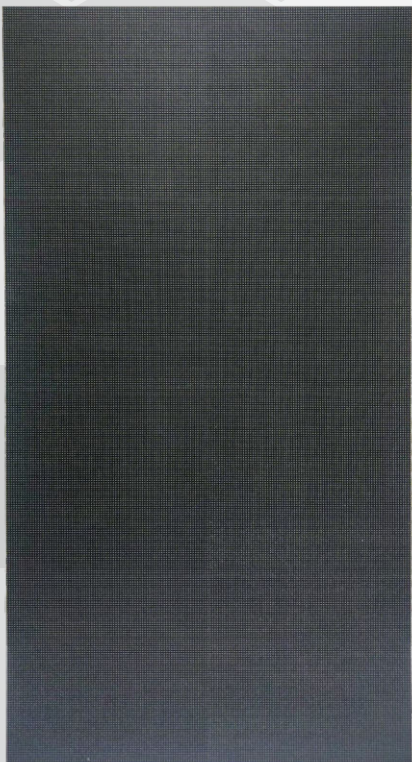


HANGING BAR: FRONT

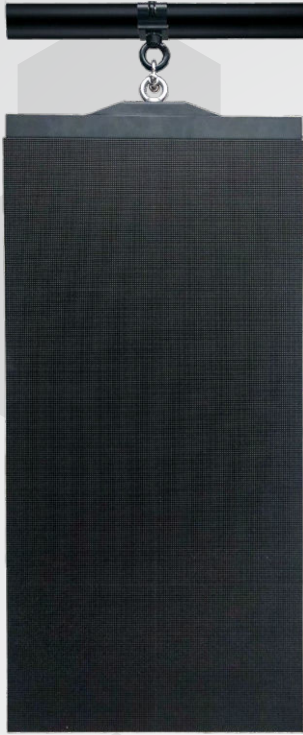

HANGING BAR: BACK



FRONT SERVICEABLE

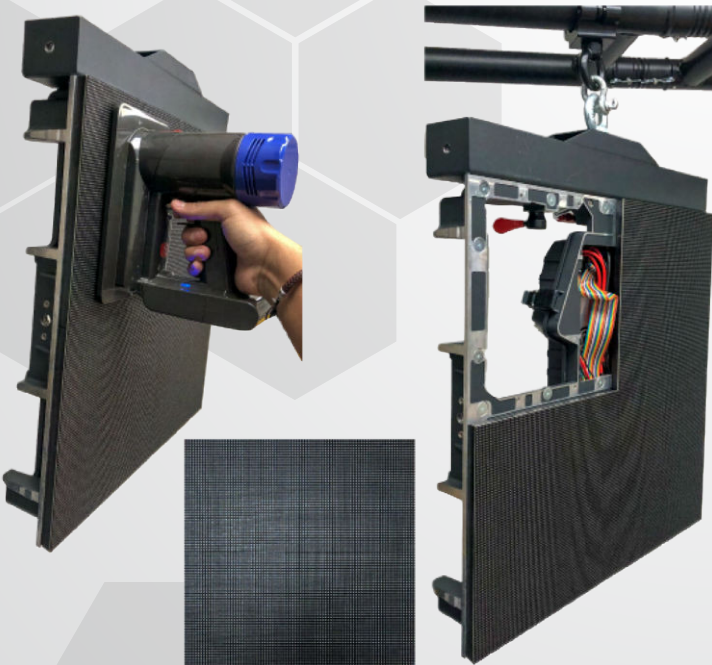

WALL MOUNTABLE



## TECHNICAL SPECIFICATIONS

<b>PIXEL PITCH</b>	P2.97 mm
<b>LED ENCAPSULATION</b>	King-Light SMD2020
<b>PIXEL DENSITY</b>	168 x 336
<b>SIZE</b>	500 x 1000 x 75mm / 19.7" x 39.3" x 3"
<b>CHIP</b>	IC2153
<b>HIGH REFRESH RATE</b>	3840hz
<b>WEIGHT</b>	32 lbs / 14.5 kg
<b>RECEIVING CARD</b>	NovaStar MRV-A5

## POWER SUPPLY


<b>OPERATION POWER</b>	100~240V 50-60Hz
<b>MAX. POWER CONSUMPTION</b>	200W/per panel
<b>AVE. POWER CONSUMPTION</b>	100W/per panel
<b>CONNECTIONS POWER/DATA</b>	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS


<b>BRIGHTNESS</b>	1500 NITS
<b>PROTECTION RATE</b>	IP45
<b>SCAN</b>	1/16
<b>FRAME FREQUENCY</b>	60 Hz
<b>VIEW ANGLE</b>	Horizontal 140°/Vertical 140°
<b>OPTIMAL VIEW DISTANCE</b>	6 ft (2m)
<b>BRIGHTNESS ADJUSTMENT</b>	0~100% 100 Levels

## DIMENSIONS

### FRONT SIZES

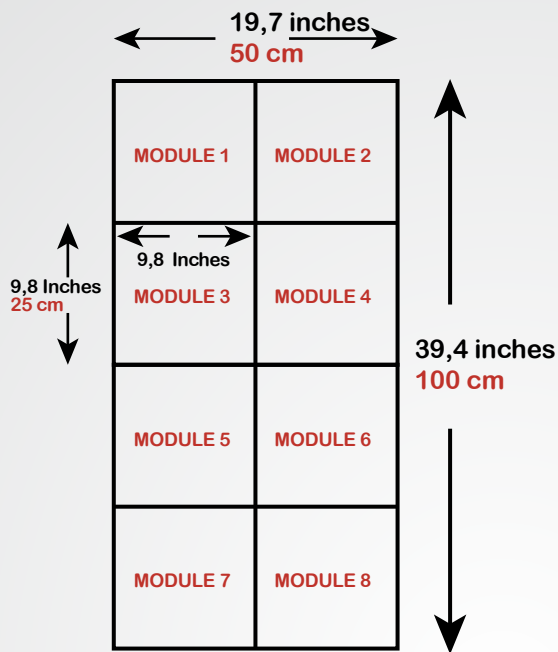

### SIDE SIZES

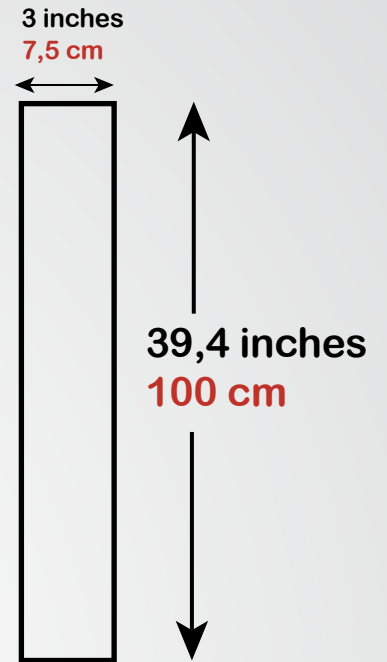

## VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	20 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

