

OUTDOOR LED PANELS

P5mm

OUTDOOR NOVASTAR IP65

Back Service

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 24 months warranty included for all parts. USA based.
- In stock. Ships immediately.

3840HZ

HIGH REFRESH RATE

4K

4K RESOLUTION




FIXED & RENTAL CABINETS



IP65 / WATER RESISTANT

FRONT

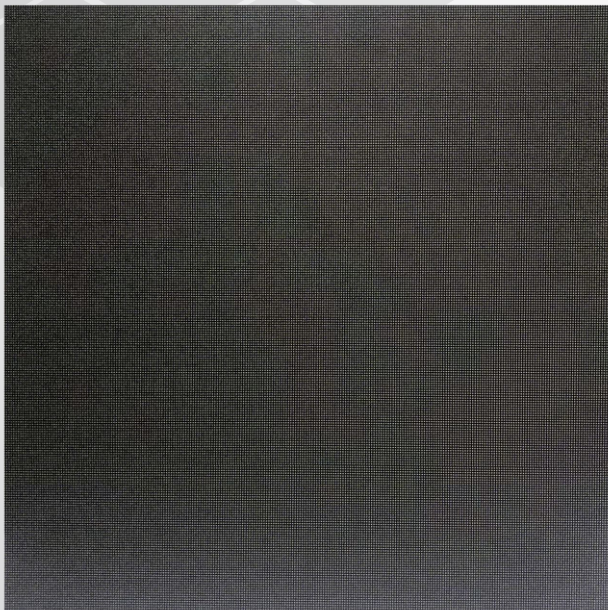


BACK






HANGING BAR: FRONT

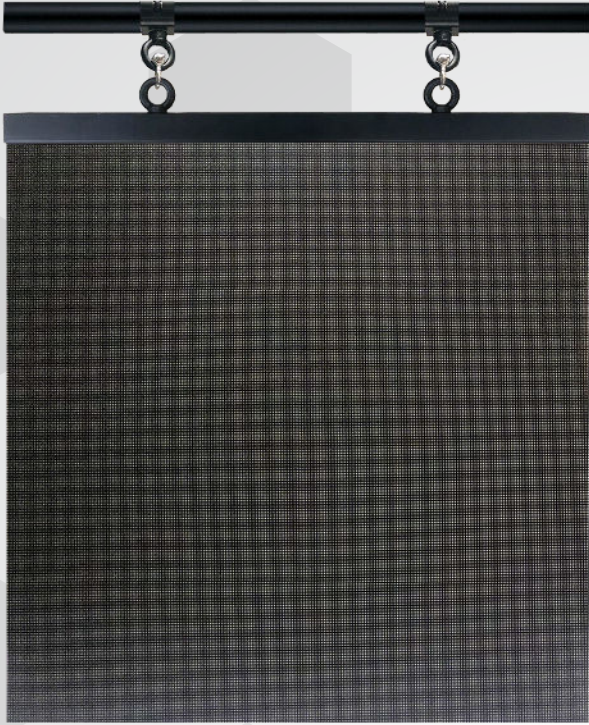

HANGING BAR: BACK



BACK: SERVICE PANEL

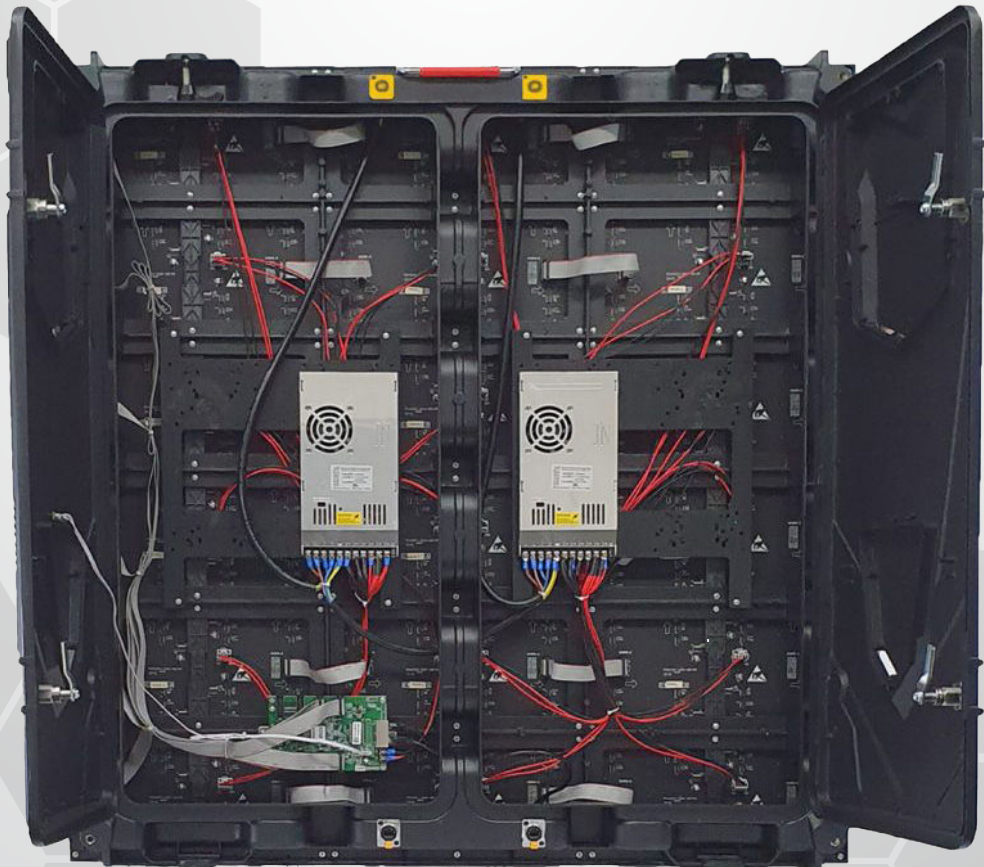

## TECHNICAL SPECIFICATIONS

<b>PIXEL PITCH</b>	P5mm
<b>LED ENCAPSULATION</b>	3-in-1 SMD3535 LED / Nationstar Encapsulation
<b>PIXEL DENSITY</b>	192 x 192
<b>SIZE</b>	960 x 960 x 80mm / 37.9" x 37.9" x 3"
<b>CHIP</b>	IC2053
<b>HIGH REFRESH RATE</b>	3840hz
<b>WEIGHT</b>	55 lbs / 25 kg
<b>RECEIVING CARD</b>	NovaStar MRV-328

## POWER SUPPLY


<b>OPERATION POWER</b>	100~240V 50-60Hz
<b>MAX. POWER CONSUMPTION</b>	500W/per panel
<b>AVE. POWER CONSUMPTION</b>	300W/per panel
<b>CONNECTIONS POWER/DATA</b>	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS


<b>BRIGHTNESS</b>	5500 NITS
<b>PROTECTION RATE</b>	IP65
<b>SCAN</b>	1/8
<b>FRAME FREQUENCY</b>	3840 Hz
<b>VIEW ANGLE</b>	Horizontal 140°/Vertical 140°
<b>OPTIMAL VIEW DISTANCE</b>	16 ft (5m)
<b>BRIGHTNESS ADJUSTMENT</b>	0~100% 100 Levels

# DIMENSIONS

## FRONT DIMENSIONS

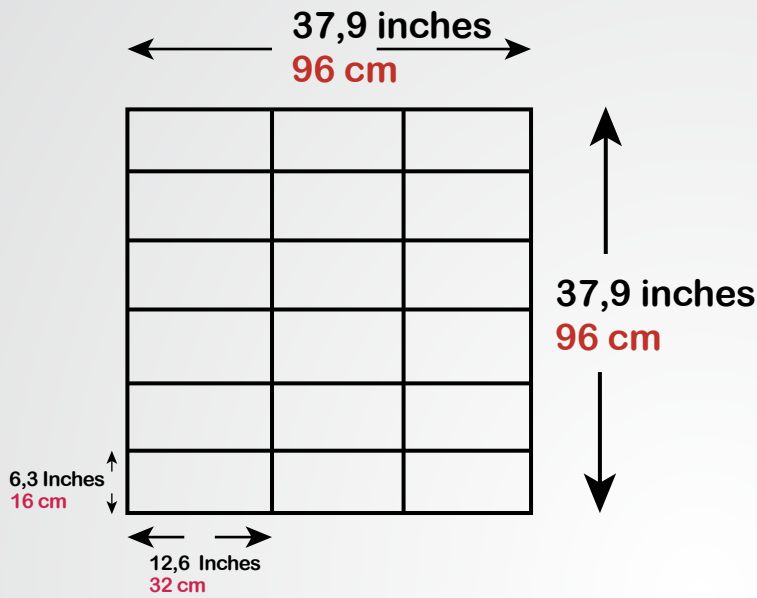

## SIDE DIMENSIONS

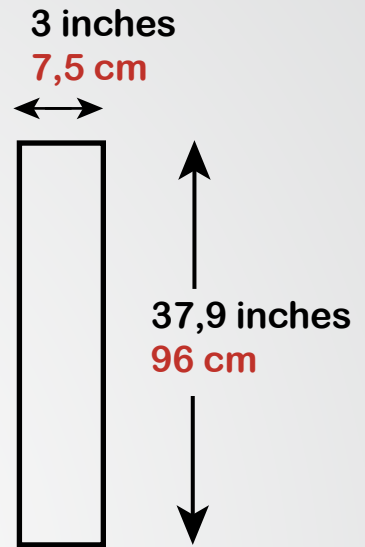

# VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	16 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

